



A201-2100 SILENCER

Commercial Grade - 14 to 20 dB(A)



APPLICATION



A rugged heavy duty silencer for commercial or industrial areas where ambient noise levels are high.

CONSTRUCTION

Heavy duty steel construction. Sizes 6" and below come standard with ID Cuff / OD Tube connections. Sizes 8" and above come standard with ANSI Flanged connections. Additional connections available. Call factory for details.

FINISH AND OPTIONAL MATERIALS

High heat powder coat on sizes 14" and smaller. High heat black paint available upon request. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details. Custom finishes available. Call factory for optional coatings.

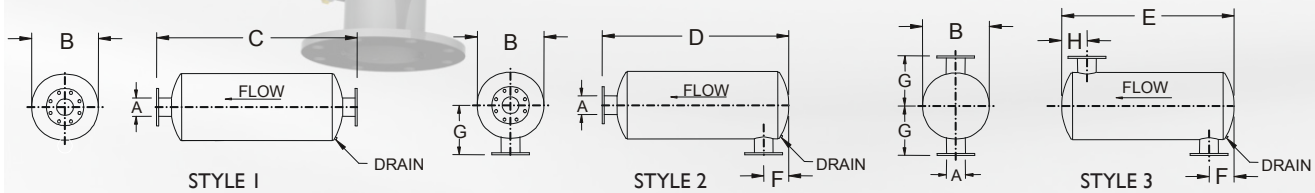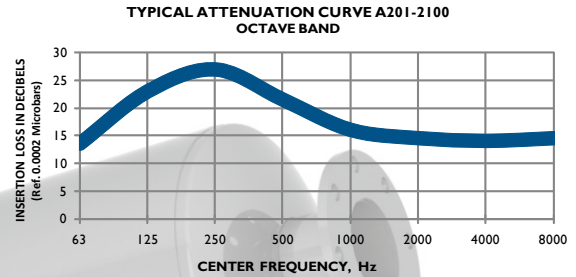

A201-2100s	A Inlet Size	B Diameter	C OAL - 1	D OAL - 2	E OAL - 3	F Min	F Max	G Flange-Center	H Min	H Max
A201-2104	4	10	36	33	30	5	13	8	5	7
A201-2105	5	10	42	39	36	5	16	9	5	9
A201-2106	6	12	42	39	36	6	16	9	6	7
A201-2108	8	18	49	45	42	8	18	13	8	8
A201-2110	10	22	62	59	56	12	25	15	12	13
A201-2112	12	26	63	59	56	12	23	17	12	12
A201-2114	14	30	76	73	70	15	31	19	15	16

Sizes 6" and below come standard with ID Cuff / OD Tube connections. Sizes 8" and above come standard with ANSI Flanged connections. Additional connections available.
 All spatial dimensions are in inches.
 Inlet sizes available up to 30.0 inches.
 F MAX is for inlet only.
 H MAX is for outlet only.

For further information on quotes, please contact GT Exhaust
quotes@gtexhaust.com
 402.323.7272
 Ref.#A2SS 01-11-11-01



A201-4100 SILENCER

Residential Grade - 19 to 25 dB(A)



APPLICATION



For areas where ambient noise levels are moderate. Excellent for use on stationary, marine, and mobile power units. Well suited for applications requiring moderate silencing.

CONSTRUCTION

Heavy duty steel construction. Sizes 6" and below come standard with ID Cuff / OD Tube connections. Sizes 8" and above come standard with ANSI Flanged connections. Additional connections available. Call factory for details.

FINISH AND OPTIONAL MATERIALS

High heat powder coat on sizes 12" and smaller; and high heat black paint on sizes 14" and larger. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details. Custom finishes available. Call factory for optional coatings.

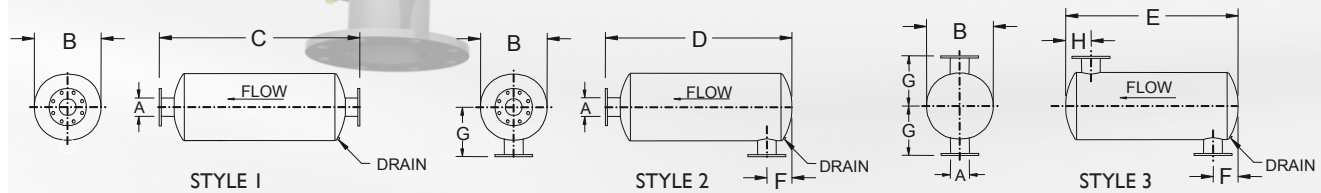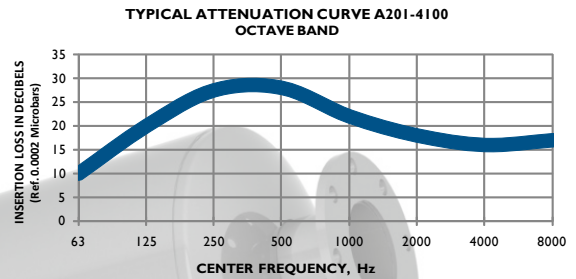

A201-4100s	A Inlet Size	B Diameter	C OAL - 1	D OAL - 2	E OAL - 3	F Min	F Max	G Flange-Center	H Min	H Max
A201-41015	1.5	6	30	27	24	3	11	5	2	7
A201-4102	2	6	36	33	30	3	14	6	3	9
A201-41025	2.5	8	42	39	36	4	18	7	4	10
A201-4103	3	8	42	39	36	4	17	7	4	10
A201-41035	3.5	10	46	43	40	5	19	8	5	11
A201-4104	4	10	46	43	40	5	19	8	5	11
A201-4105	5	10	54	51	48	6	23	9	6	14
A201-4106	6	12	54	51	48	6	23	9	6	12
A201-4108	8	18	61	57	54	8	25	13	8	13
A201-4110	10	22	74	71	67	12	32	15	12	17
A201-4112	12	26	75	72	69	13	31	17	13	17
A201-4114	14	30	100	97	94	15	45	19	15	26
A201-4116	16	36	114	111	109	17	53	22	17	30
A201-4118	18	36	126	123	119	18	64	22	18	38
A201-4120	20	42	139	136	133	20	65	25	20	36
A201-4122	22	48	141	138	136	22	74	29	22	37
A201-4124	24	54	142	139	137	24	65	31	24	35

Sizes 6" and below come standard with ID Cuff / OD Tube connections. Sizes 8" and above come standard with ANSI Flanged connections. Additional connections available. All spatial dimensions are in inches. Inlet sizes available up to 30.0 inches. F MAX is for inlet only. H MAX is for outlet only.

For further information on quotes, please contact GT Exhaust
quotes@gtexhaust.com
 402.323.7272
 Ref.#A2SS 01-11-11-01



A202-2100 SPARK ARRESTING

Commercial Grade - 12 to 20 dB(A)



APPLICATION




A spark arresting silencer for use on exhaust of internal combustion engines where fire hazards exist, and minimal silencing is required. Centrifugal force separates solids from the exhaust gas stream. Solids are then deposited in easily accessible cleanouts.

CONSTRUCTION

Heavy duty steel construction. Sizes 6" and below come standard with ID Cuff / OD Tube connections. Sizes 8" and above come standard with ANSI Flanged connections. Additional connections available. Call factory for details.

FINISH AND OPTIONAL MATERIALS

High heat powder coat on sizes 14" and smaller, and high heat black paint on sizes 16" and larger. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details. Custom finishes available. Call factory for optional coatings.

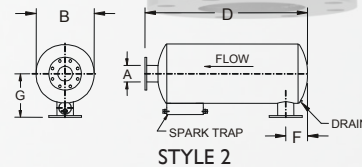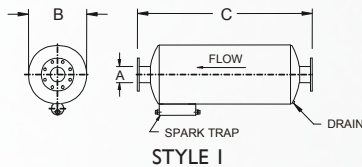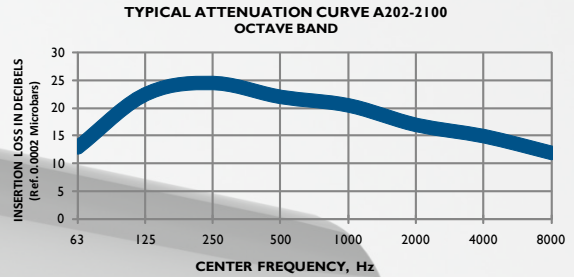

A202-2100s	A Inlet Size	B Diameter	C OAL - Style 1	D OAL - Style 2	F Min	F Max	G Flange-Center
A202-2104	4	10	36	33	5	9	8
A202-2105	5	10	42	39	6	12	9
A202-2106	6	12	42	39	6	12	9
A202-2108	8	18	49	45	8	11	13
A202-2110	10	22	62	59	10	15	15
A202-2112	12	26	63	59	12	13	17
A202-2114	14	30	76	73	15	19	19
A202-2116	16	42	81	77	16	16	25
A202-2118	18	48	100	96	18	22	28
A202-2120	20	48	118	114	20	29	28
A202-2122	22	54	120	116	21	29	31
A202-2124	24	60	132	128	24	33	34

Sizes 6" and below come standard with ID Cuff / OD Tube connections. Sizes 8" and above come standard with ANSI Flanged connections. Additional connections available. All spatial dimensions are in inches. Inlet sizes available up to 30.0 inches. F MAX is for inlet only.

For further information on quotes, please contact GT Exhaust
quotes@gtexhaust.com
 402.323.7272
 Ref.#A2SS 01-11-11-01



A202-4100 SPARK ARRESTING

Residential Grade - 18 to 25 dB(A)



APPLICATION



A spark arresting silencer for use on exhaust of internal combustion engines where fire hazards exist. Well suited for applications where surrounding environment requires a moderate level of silencing. Centrifugal force separates solids from the exhaust gas stream. Solids are then deposited in easily accessible cleanouts.

CONSTRUCTION

Heavy duty steel construction. Sizes 6" and below come standard with ID Cuff / OD Tube connections. Sizes 8" and above come standard with ANSI Flanged connections. Additional connections available. Call factory for details.

FINISH AND OPTIONAL MATERIALS

High heat powder coat on sizes 10" and smaller, and high heat black paint on sizes 12" and larger. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details. Custom finishes available. Call factory for optional coatings.

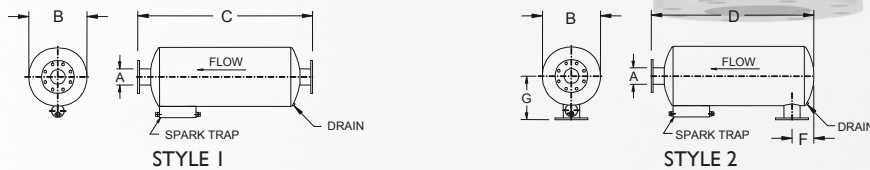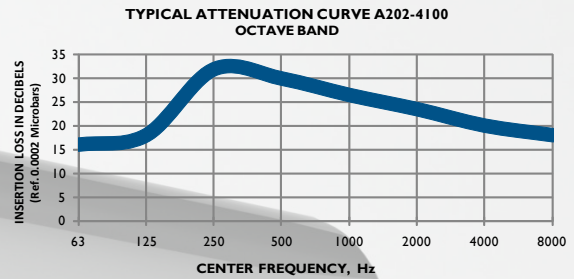

A202-4100s	A Inlet Size	B Diameter	C OAL - Style 1	D OAL - Style 2	F Min	F Max	G Flange-Center
A202-41015	1.5	6	30	27	3	9	5
A202-4102	2	6	36	33	3	12	6
A202-41025	2.5	8	42	39	4	14	7
A202-4103	3	8	42	39	4	11	7
A202-41035	3.5	10	46	43	5	15	8
A202-4104	4	10	46	43	5	15	8
A202-4105	5	10	54	51	6	18	9
A202-4106	6	12	54	51	6	17	9
A202-4108	8	18	61	57	8	17	13
A202-4110	10	22	74	71	12	21	15
A202-4112	12	26	75	72	13	20	17
A202-4114	14	30	100	97	15	31	19
A202-4116	16	36	114	111	17	41	22
A202-4118	18	36	126	123	18	41	22
A202-4120	20	42	139	136	20	45	25
A202-4122	22	48	141	138	22	43	29
A202-4124	24	54	142	139	24	40	31

Sizes 6" and below come standard with ID Cuff / OD Tube connections. Sizes 8" and above come standard with ANSI Flanged connections. Additional connections available. All spatial dimensions are in inches. Inlet sizes available up to 30.0 inches. F MAX is for inlet only.

For further information on quotes, please contact GT Exhaust
quotes@gtexhaust.com
 402.323.7272
 Ref.#A2SS 01-11-11-01