

APPLICATION



Designed for applications where an acute attenuation is mandatory. This model performs the work of two silencers in series. Recommended for use in highly critical environments requiring extreme exhaust noise attenuation.

CONSTRUCTION

Heavy duty steel construction. Sizes 4" and above come standard with ANSI Flanged connections. Additional connections available. Call factory for details.

FINISH AND OPTIONAL MATERIALS

High heat powder coat on sizes 12" and smaller; and high heat black paint on sizes 14" and larger. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details.

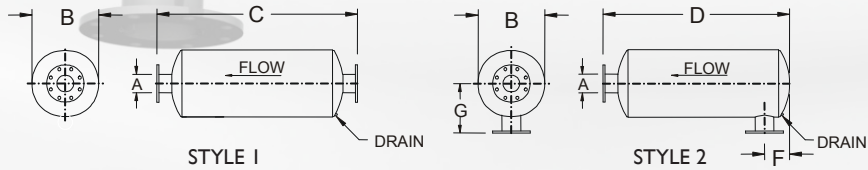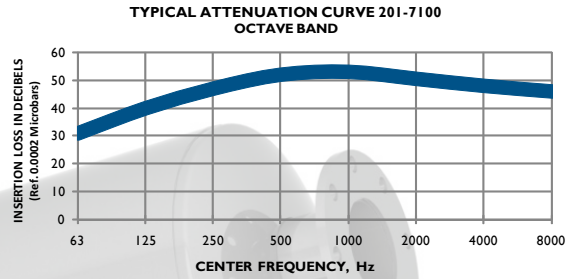

Part Number	A Inlet Size	B Diameter	C OAL - 1	D OAL - 2	F Min	F Max	G Flange-Center	WT
A201-7104	4	14	84	81	6	24	11	158
A201-7105	5	18	105	101	7	30	14	248
A201-7106	6	22	105	102	8	30	15	336
A201-7108	8	24	106	102	10	30	16	411
A201-7110	10	28	161	158	11	52	18	760
A201-7112	12	36	163	160	14	47	22	1120
A201-7114	14	42	190	186	16	64	25	1739
A201-7116	16	42	202	198	17	62	25	1788
A201-7118	18	48	228	224	18	62	29	2372
A201-7120	20	54	230	227	20	85	32	2786
A201-7122	22	60	244	240	22	84	35	3304
A201-7124	24	60	244	240	23	84	36	3334

All spatial dimensions are in inches. Inlet sizes available up to 30.0 inches.
Additional connections available. F MAX is for inlet only.
Weights are in pounds. Weights are approximate.

Use diameter to find bracket sizes. Example: A201-7108 (24" dia) would require 28-2400 brackets (or similar 29 brackets).

Prices

FREIGHT: Prepaid unless preapproved by GT Exhaust.

TERMS: Net 30 days.

Prices subject to change without notice. Restocking charge 25% / \$50 minimum.

Specialty items are non-returnable and non-refundable.

Minimum order size \$50. All prices are in US Dollars.

Ref. # SSB 06-01-2011-01