

**APPLICATION**

A highly efficient spark arrestor, that utilizes centrifugal force to separate the solids from the exhaust gas. Ideal for both stationary and mobile applications.

Models 1.5 thru 6" have been tested by the U.S. Forestry Service, and have a efficiency rating of 95% or greater.

Typical Attenuation: 3 to 5 dB'A'

**INSTALLATION**

Approved for both horizontal and vertical installation.



**CONSTRUCTION**

Features all welded heavy-gauge construction. Shell and heads are aluminized steel with stainless steel internal critical parts.

Sizes up to 6" are standard with ID Slotted Cuff Inlet and OD Outlet. Sizes 8" and up are standard with 125/150# ANSI steel plate flange Inlet and OD Outlet.


**FINISH**

Sizes 8" and up are standard with high heat aluminum. Consult factory for optional coatings.

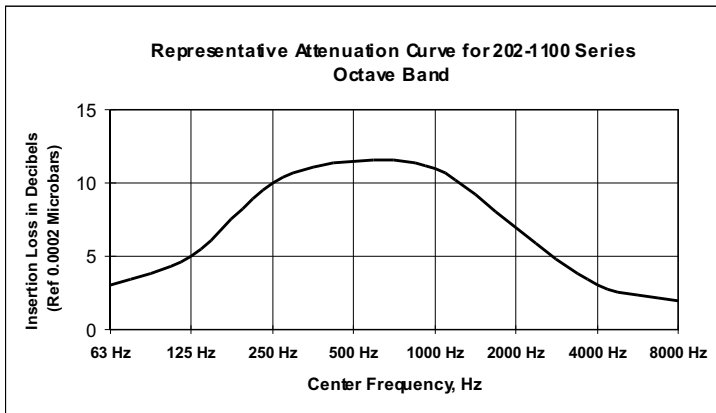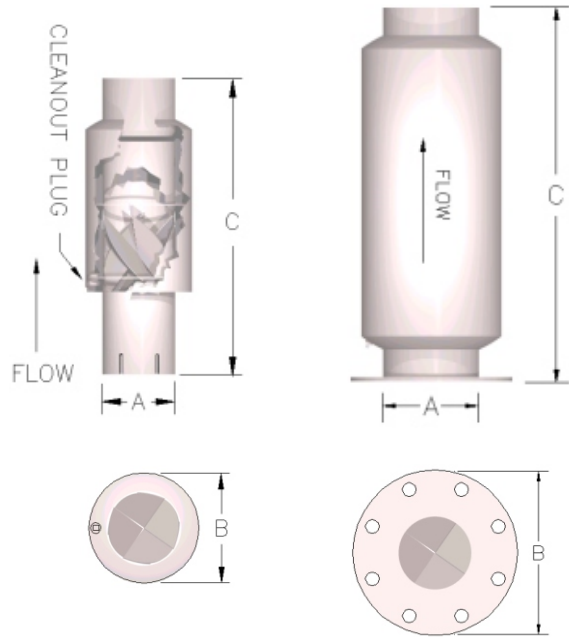

Model	A SIZE	B DIA	C OAL
202-AZ-11015	1.5	6	9.5
202-AZ-1102	2	6	11.1
202-AZ-11025	2.5	6.3	13
202-AZ-1103	3	7	14.6
202-AZ-11035	3.5	7	16.5
202-AZ-1104	4	8	18.1
202-AZ-1105	5	9	20.8
202-AZ-1106	6	10	23.5
202-AZ-1108	8	14	35.5
202-AZ-1110	10	16	41.5
202-AZ-1112	12	18	48
202-AZ-1114	14	20	54
202-AZ-1116	16	22	60
202-AZ-1118	18	24	66
202-AZ-1120	20	26	72
202-AZ-1122	22	28	78
202-AZ-1124	24	30	84

(AZ) = ALUMINIZED STEEL

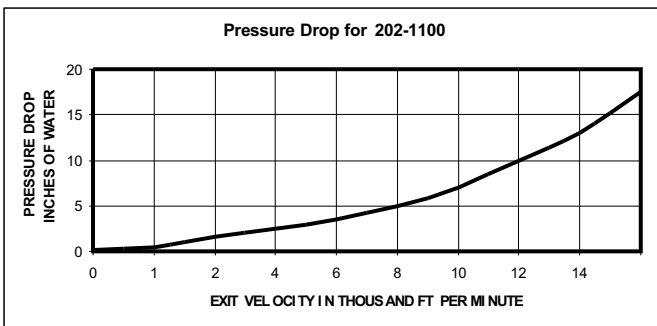

All dimensions are in inches.  
 Inlet Sizes available up to 30.0"