

GT Exhaust Systems, Inc.

Phone: 402-323-7272 Fax: 402-323-7270

203-2100 Series Industrial Grade Turbo Silencer

APPLICATION

An industrial grade silencer configured for use on turbo charged engines. Excellent for industrial or semi residential areas where ambient noise levels are relatively high.

Typical Attenuation: 14 to 20 dB'A'

INSTALLATION

May be installed in any position

CONSTRUCTION

Silencers feature an all welded heavy-duty construction. A straight through (line of sight) absorption silencer with special thermal acoustical fiberglass packing. Standard with 125/150# ANSI steel plate flanges.

MATERIAL OPTIONS

A variety of material options are provided to satisfy most applications and budgets:

C	Carbon Steel
AS	Aluminized Shell
AH	Aluminized Shell and Heads
S	Stainless Steel




FINISH

Standard finish is high heat silicone black or aluminum, depending on material options. Consult factory for optional coatings.

STAINLESS STEEL OPTIONS: 304, 316, & 316L

CUSTOM PRODUCTS

Special requirements? GT can customize its products to meet your Specifications.

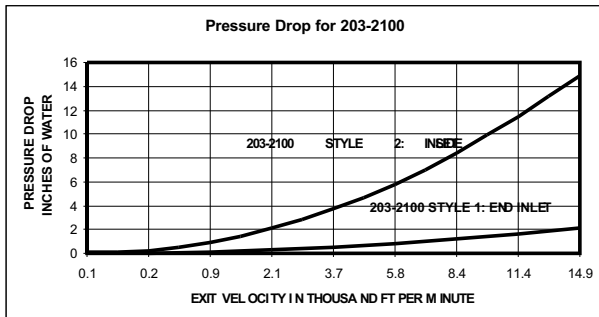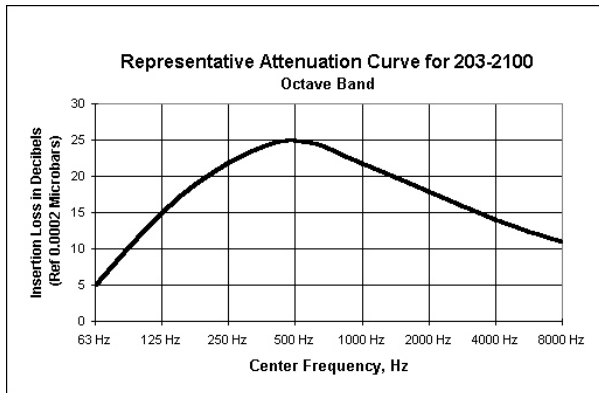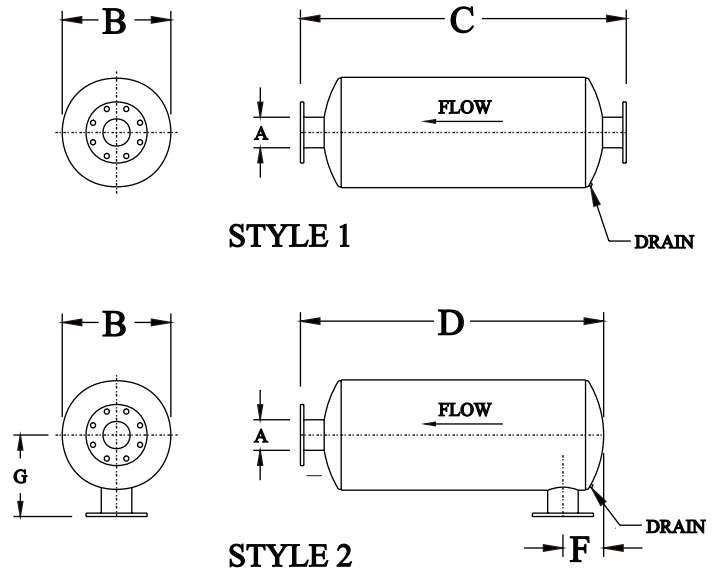

All dimensions are in inches.
Inlet Diameters available up to 30"

Model	A SIZE	B DIA	C OAL-1	D OAL-2	F MIN	G	WT *
203-2104	4	9	36	40	4	7.5	24
203-2105	5	10	48	52	5	9	65
203-2106	6	10	60	64	5	9	70
203-2108	8	14	66	80	7	11	125
203-2110	10	16	70	81	8	12	165
203-2112	12	18	70	81	10	13	205
203-2114	14	20	88	98	11	14	300
203-2116	16	24	108	118	12	16	425
203-2118	18	26	108	119	13	17	485
203-2120	20	28	132	155	15	18	765
203-2122	22	30	136	155	16	19	945
203-2124	24	36	196	218	18	22	1410

* SIDE INLET MODELS ARE APPROXIMATELY 10% HEAVIER THAN THE CATALOG POSTED WEIGHTS SHOWN ABOVE

ORDERING INFORMATION

When ordering, please place Material and Style Options as illustrated in the examples below:

- 203-2104-2-C Carbon Steel Construction with Style 2 -- Side Inlet
- 203-2112-1-AS Aluminized Shell with Style 1 -- End Inlet
- 203-2108-2-S Stainless Steel with Style 2 -- Side Inlet